Eagle II™





Ventilation Simplified™

All-Purpose Ventilator

Ideal for the ED, the ICU, and intra-hospital transport

Full Patient Range

For patients from infant (≥ 5 kg) through adult

Smart Help™ Display

Guides operator through on-screen commands when responding to alarms

Intuitive Design

User-friendly, straight-forward interface

Unprecedented Battery Run-Time

No additional battery back-up needed thanks to a 10-hour battery run-time. Battery recharges to 90% in 2 hours.

Eagle II™ Specifications

Clinical Specifications

Operating Modes: AC, SIMV,

CPAP, BL

Breath Target: Volume and pressure

Special Functions: Plateau Pressure, Manual Breath, Apnea Backup, Oxygen in Use, Inverse Ratio

Flow Rate: 0 to 100 LPM @ 40 cm

H,0

Breath Rate: 1 to 80 BPM

Tidal Volume: 50 to 2000 ml ATPD ±

10% of setting

Inspiratory Time: 0.3 to 5.0 seconds

I:E Ratio: 1:99 to 4.0:1.0

FiO2: 21 to $100\% \pm 3\%$ of full scale \pm

10% of setting

PEEP: 0 to 30 cm H₂O

Pressure Support: 0 to 60 cm H₂0

Peak Inspiratory Pressure (PIP):

10 to 80 cm H20

Trigger Sensitivity: -0.5 to -6.0 cm

Oxygen Input Pressure: 55 psig

(-25%; +20%) (380 kPa)

Safety Specifications

Airway Pressure High Limit: 20 to 100 cm H_oO values

Airway Pressure Low Limit: Off, 3 to 35 cm H₂O

BPM High Alarm Limit: Off, 2 to 99 **BPM Low Alarm Limit:** 2 to 40 **LED Status/Alarm Indicator:**

Red, yellow, and green, LCD/LED

adjustable

Environmental

Operating Voltages: 100 to 240 VAC (50/60 Hz) or 12.5 to 28.0 VDC Operating Time: Internal battery 10 hours

Temperature Ranges:

Operating: -25° to 49° C (-13 to 120°F) with battery charging, battery discharge and AC power operation

Battery Charging: 0° to 45°C (32°

to 113°F)


Long-Term Storage: -15° to 21°C (5° to 71°F) Optimal storage

conditions

General

Size: 8.0" wide x 12.5" high x 4.5" deep (20.3 cm wide x 31.8 cm high x 11.4 cm deep)

Weight: 9.7 lbs (4.4 kg)

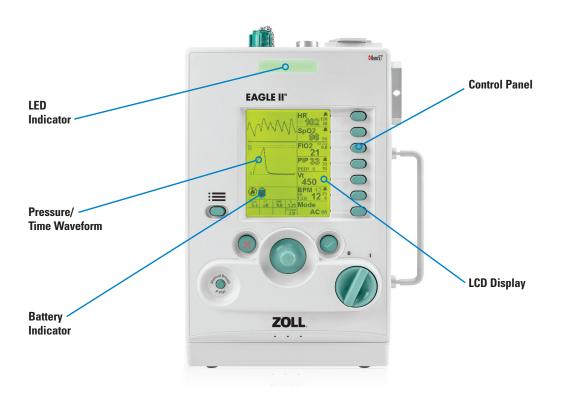

ZOLL Medical Corporation Worldwide Headquarters 269 Mill Road Chelmsford, MA 01824

978-421-9655

For subsidiary addresses and fax numbers, as well as other global locations, please go to www.zoll.com/contacts.



