

X Series® Advanced

Advance your care
for every rescue.



Technical Specifications

General

Weight: 10.58 lbs without battery and paper, 11.68 lbs with battery and paper

Dimensions: 8.89 in x 10.39 inches x 7.91 inches

Enclosure Protection:

Solid Foreign Object: IEC 60529, IP5X

Water: IEC 60529, IPX5

Operating Temperature:

32- 122 F

-4- 140 F for 1 hour after the device has been resting at room temperature

Storage Temperature: -22- 158 F

Storage Temperature Note: The X Series Advanced device may not perform to specifications when stored at the upper or lower extreme limits of storage temperature and immediately put into use.

Humidity: 15 to 95% RH

(non-condensing)

Vibration: EN ISO 9919 (per IEC 60068-2-64) • RTCA/DO-160G (multiple helicopter frequencies) • EN 1789 for ambulance

Shock: IEC 60068-2-27, 100g, 6 ms half sine

Drop: EN 1789, 30 inches functional drop, IEC 60601-1, tested at 6.56 ft

Altitude: -557.743 ft to 15,000 ft

Monitor/Display

Size: 6.51 inches diagonal

Input: 3-lead, 5-lead, or 12-lead patient cable, paddles (authorized ZOLL electrodes via multifunction cable)

Type: Color LCD, 640 x 480 pixels, 800 MCD

Sweep Speed: 0.98 inches or 1.96 inches (user selectable)

Lead Selections: Paddles (Pads), I, II, III, AVR, AVL, AVF, V1-6

Frequency Response:

0.67 to 20 Hz Limited response

0.67 to 40 Hz Monitoring response

0.525 to 40Hz Filtered Diagnostic response

0.525 to 150Hz Diagnostic response

Defibrillator

Waveform: Rectilinear Biphasic™

Energy Selections: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, 30, 50, 70, 85, 100, 120, 150, 200 joules

Energy Display: Display indicates selected and delivered energy

Charge Time: Less than 7 seconds with a new, fully charged battery

Charge Controls: Front panel and on apex paddle

Pads/Paddles: Hands-free pads and external adult and pediatric paddles. Adult paddles slide off to expose pediatric paddles

Synchronized Mode: Synchronizes defibrillator pulse to patient's R wave. "SYNC" message displayed on monitor and markers shown on both monitor and recorded ECG

RapidShock: Shock/No Shock decision with pre-charge of the device in 4 to 5 seconds (RapidShock is only available in adult mode when ZOLL authorized CPR electrodes are used.)

Patient Modes

User Selectable: Adult, Pediatric, Neonate.

Automatically sets configurable defaults for alarm limits, defibrillation energy, and NIBP settings

Trends (on-screen)

All parameters trended/viewable 30 seconds

Trend Intervals: 1, 5, 10, 15, 20, 60 minutes (Tabular)

TBI Dashboard™

SBP: Over the last 15 minutes and updates whenever a new reading is taken

SPO₂: data over the last 3 minutes and updates the data every second

Duration: 24 hours at 1-minute intervals

Snapshots: 32 monitor snapshots

Memory Capacity

A combination of 24 hours of trends at

1-minute intervals, 500 non-ECG events and 32

snapshots, including monitor, defibrillator, pacemaker, and treatment snapshots

Pacer

Type: External transcutaneous pacing

Pulse Types: Rectilinear, constant current

Pulse Width: 40 ms ± 2 ms

Pacer Rate: 30 – 180 bpm ± 1.5%

Output Current: 0 – 140 mA ± 5% or 5 mA, whichever is greater

Modes: Demand and Fixed

Real-Time Clinical Feedback

See-Thru CPR®: Filters out compression artifact

Real CPR Help Dashboard™: Real-time depth and rate


feedback. CPR Dashboard™: Numeric readout of pedi

and adult depth and rate, release indicator, perfusion

performance indicator (PPI)

Real BVM Help®: Provides ventilation feedback including rate and tidal volume in ml

TBI Dashboard: Provides graphical trends for SpO₂, Systolic BP and EtCO₂
EtCO₂; data over the last 3 minutes and updates every second

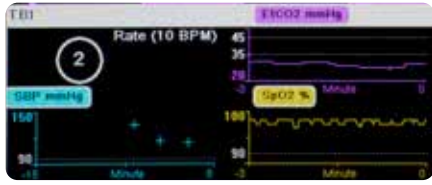

ECG

Cable Detection: Automatic 3-, 5-, 12-lead ECG
Input: 3-lead cable, 5-lead cable, 12-lead cable, paddles, therapy cable
Leads: I, II, III, AVR, AVL, AVF, V1 – V6
Heart Rate Range: 30 – 300 bpm
Heart Rate Accuracy: ± 3 bpm or 3%, whichever is greater
Pacer Detection and Display
ECG Sizes: 0.04, 0.09, 0.19, 0.39, 0.78, 1.57/mV, and auto-ranging
Sweep Speed: 0.98 inches/sec, 1.96 inches/sec

Masimo® SET SpO₂

Saturation Range: 0 – 100%
Saturation Accuracy:
Oxygen Saturation (% SpO₂) - During no motion conditions 60 - 80 ± 3%, Adults/Pediatrics/Infants 70 - 100 ± 2%, Adults/ Pediatrics/Infants; ± 3%, Neonates Oxygen Saturation (% SpO₂) - During Motion Conditions 70% - 100% ± 3% Adults/ Pediatrics/Infants/Neonates Oxygen Saturation (% SpO₂) - During Low Perfusion Conditions 70 - 100 ± 2%, Adults/Pediatrics/Infants/Neonates
Pulse Rate Range: Pulse Rate (bpm) 25-240 bpm During No Motion Conditions
25 - 240 ± 3 bpm Adults/Pediatrics/Infants/Neonates Pulse Rate (bpm) - During Motion Conditions 25 - 240 ± 5 bpm Adults/Pediatrics/Infants/Neonates Pulse Rate (bpm) - During Low Perfusion Conditions
25 - 240 ± 3 bpm Adults/Pediatrics/Infants/Neonates
SpO₂ Average time setting:
4, 8 (default), 16 seconds

Masimo rainbow® SET SpCO[®]

Range: 0 – 99%
Accuracy: 1 – 40% ± 3 digits

Masimo rainbow® SET SpMet[®]

Range: 0 – 99%
Accuracy: 1 – 15% ± 1 digits

Masimo rainbow® SET SpHb[®]

Measurement Range: 0 - .88 oz/dL
Accuracy (Adults/Infants/Pediatrics): 0.28- 0.59 oz/dL +/- 0.03 oz/dL
Resolution (SpHb g/dL): 0.003 oz/dL

Masimo rainbow® SET SpOC[™]

Measurement Range: 0-1.18 fl oz of O₂/dL of blood
Resolution: 0.003 fl oz/dL

Masimo Perfusion Index (PI)

Measurement Range: 0.02 – 20%
Resolution: 0.1%

Masimo Pleth Variability Index (PVI[®])

Measurement Range: 0 – 100%
Resolution: 1%

Non-Invasive Blood Pressure (NIBP)

Smartcuf[®] and Sure BP[®] NIBP technology
Measurement Intervals: Automatic 1-, 2-, 3-, 5-, 10-, 15-, 30-, 60-minute, and manual quick-action NIBP Start/Stop button
TurboCuf: 5 min of repeated NIBP readings
Display: Systolic, diastolic, mean. Viewable on-screen with large numerics
Cuff Overpressure Protection
Typical Measurement Time:
30 – 45 sec (on deflation)
15 – 30 sec – Sure BP (on inflation)
Standard Cuff Sizes:
Adult Mode: Adult, large adult, small adult, child, thigh
Pediatric Mode: Child, small child, small adult, infant, newborn
Neonate Mode: Neonate #1 to #5 – disposable, newborn (#6), infant (#7) – reusable
Default Cuff Inflation Pressure:
Adults: 160 mmHg
Pediatrics: 120 mmHg
Neonates: 90 mmHg
Pressure Measurement Range:
Systolic: 20 – 260 mmHg
Diastolic: 10 – 220 mmHg
Mean: 13 – 230 mmHg
Maximum Cuff Inflation Pressure:
Adults: 270 mmHg
Pediatrics: 170 mmHg
Neonates: 130 mmHg

Microstream[®] EtCO₂

Range:
0 – 150 mmHg
Accuracy:
0-38 mmHg: +/- 2 mmHg
39-150 mmHg: +/- 5% of reading + 0.08% for every 1 mmHg above 38 mmHg
Respiration Range: 0 – 149 breaths per minute
Respiration Rate Accuracy:
0 – 70 bpm ± 1 bpm
71 – 120 bpm ± 2 bpm
121 – 149 bpm ± 3 bpm
Flow rate: 1.69 fl oz/min -7.5 + 0.5 fl oz/min
Typical response time: 2.9 seconds
Maximum response time: 3.9 seconds

Impedance Pneumography

Displayed Data: Numeric breath rate, Impedance waveform
Breath Rate Range: Adult, Pediatric:
2 to 150 breaths/minute. Neonates: 3 to 150 breaths/minute
Breath Rate Accuracy: 2% or ± 2, whichever is greater
Displayed Breath Rate: Average of last 10 breath-to-breath rates
Leads: Lead I (RA – LA), Lead II (RA – LL)
Sweep Speed: 0.12, 0.24, 0.49 inches/sec
Alarm Settings: High, low, and no breath rate alarm

Temperature

Two YSI 400/700 series-compatible channels
Range: 32- 122 F
Units: °C or °F
Display: T1, T2, and Delta temp
Accuracy: ± 32.18 F from 50- 122 F ±32.36 F from 32- 50 F

Printer

Type: High-resolution thermal array
Annotation: Time, date, ECG lead, ECG gain, heart rate, defibrillation, and pacing parameters and treatment summary events
Paper Width: 3.14 inches
Paper Speed: 0.98 inches/sec, 1.96 inches/sec
Delay: 6 seconds
Frequency Response: Automatically set to monitor's frequency response
Record Modes: Manual and automatic (user configurable)
Print Option Single waveform or a combination up to 3, on alarm, snapshots, treatment summary report, and trend summary

Battery

Type: Rechargeable lithium-ion, 11.1 Vdc, 6.6 Ah, 73 Wh
Capacity: With a new, fully charged battery operating at room temperature: • At least 7 hours of continuous monitoring of 3/5 lead ECG and Display Brightness set to 70%. • At least 6 hours of continuous monitoring of ECG, SpO₂, CO₂, and 2 channels of Temperature, with NIBP measurements every 15 minutes and 10 200 J shocks (display set to 30%). • At least 3.5 hours pacing, with ECG, SPO₂, CO₂, 2 channels of Temperature, with NIBP measurements every 15 minutes, and pacing at 180 ppm, and 140 mA (display set to 30%). • At least 3 hours of AED (Rescue Protocol) monitoring with ECG, SpO₂, CO₂, and 2 channels of Temperature, with NIBP measurements every 15 minutes, 2-minute CPR intervals, and 200 J shock discharges after every CPR interval (display set to 70%). • At least 2 hours while pacing at 180ppm and 140mA, with continuous monitoring of ECG, SpO₂, CO₂, and NIBP measurements every 15 minutes, followed by at least 35 2-minute CPR intervals, with discharges at maximum shock setting (200 J) after every CPR interval (display set to 70%). • At least 300 discharges at maximum shock energy (200 joules) with no parameters and 70% brightness. • At least 10 discharges at maximum shock setting (200 joules) after a Low Battery indication
AC Power Adapter: 100 – 240 VAC 50-60 Hz, 2A 100 – 115 VAC 400Hz, 2A

ZOLL MEDICAL CORPORATION

An Asahi Kasei Company | 269 Mill Road | Chelmsford, MA 01824 | 978-421-9655 | 800-804-4356 | www.zoll.com

Specifications subject to change without notice.

© 2021 ZOLL Medical Corporation. All rights reserved. CPR Dashboard, Rectilinear Biphasic, Real CPR Help, RescueNet, See-Through CPR, X Series, and ZOLL are trademarks or registered trademarks of ZOLL Medical Corporation in the United States and/or other countries. Smartcuf, and Sure BP are registered trademarks of Welch Allyn. Masimo, Rainbow, SET, SpCO, SpHb, SpMet, and SpOC are trademarks or registered trademarks of Masimo Corporation. Microstream is a registered trademark of Oridion Medical 1987 Ltd. All other trademarks are the property of their respective owners. ZOLL X Series Advanced is not available for sale in the United States. The product has not received regulatory clearance/approval by the Food and Drug Administration.

Printed in U.S.A. MCN EP 2101 0352

For subsidiary addresses and fax numbers, as well as other global locations, please go to www.zoll.com/contacts.

ZOLL[®]